
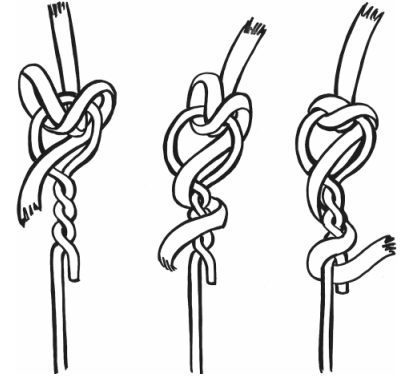
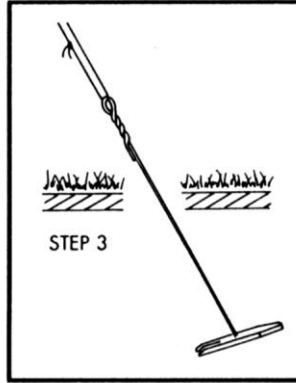
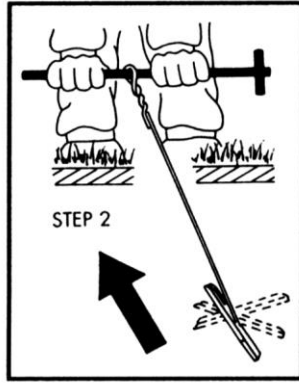
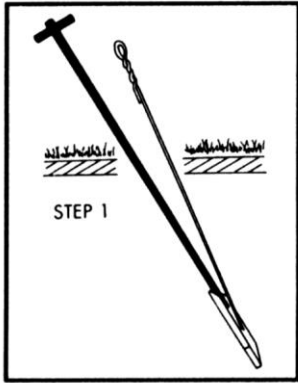


# Speed Stake® Installation Instructions

## Item # 3A-SS

### Required items:

Speed Stake® and Speed Stake® Driving Tool (3A-SST) (sold separately)  
 Tree Guying Strap (3A-GSS.75x500) (sold separately)

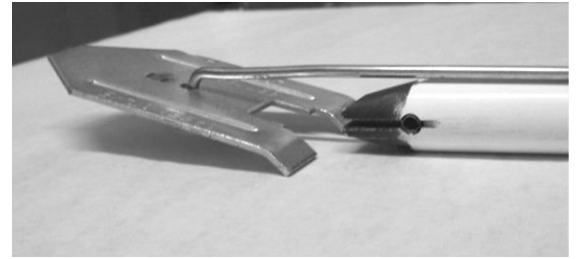

Speed Stake® Knot

### Drive the anchor:

Locate installation area.

1. Lock the Speed Stake® into the driving tool. Drive into the soil at an angle\*, pointing the anchor shaft where you want to tie off to the tree.
2. Remove tool and slip tool through anchor eyelet and pull upwards until no movement is felt.

### Anchor the tree:


- 3.a. Tie the guying strap to the tree.
- 3.b. Tie the opposite end of the guying strap to the Speed Stake® eyelet using the Speed Stake® Knot (as shown).

If the tree ball settles, loosen the Speed Stake® knot, take up the slack and retighten the Speed Stake® knot.  
 No turnbuckle, hose or wire to worry about.

**Removal** is easy. a) Clip wire below ground level.

b) Fold cut end over on itself with pliers leaving no sharp ends.

Tree view from above:  
 Evenly spaced anchors around tree.

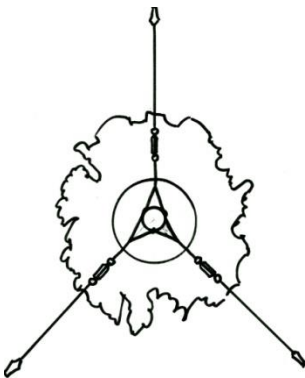

**\*Note:** Drive the Speed Stake® into the ground at an angle that allows a straight line to be created between the base of the anchor and the tree trunk tie-off point.

